

Please type a plus sign (+) inside this box ☒

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	104141-0004
	First Inventor or Application Identifier	Edward Klein et al.
	Title	SYSTEM FOR NON-DISRUPTIVE INSERTION AND REMOVAL OF NODES IN AN ATM SONET RING
	Express Mail Label No.	EL056800815US

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility application contents

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ *Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **14**]
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) [Total Sheets **3**]

4. Oath or Declaration [Total Pages **3**]

- a. ☒ Newly executed (original copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)

[Note Box 5 below]

DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b)

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
☐ The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (Identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 C.F.R. § 3.73(b) Statement (when there is ☒ Power of Attorney an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ *Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

***NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: /

Prior application Information: Examiner

Group/Art Unit:

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Patricia A. Sheehan					
Address	Cesari and McKenna 30 Rowes Wharf					
City	Boston	State	MA	Zip Code	02110	
Country	U. S. A.	Telephone	(617) 951-2500	Fax	(617) 951-3927	

Name (Print/Type)	Patricia A. Sheehan	Registration No. (Attorney/Agent)	32,301
Signature	Patricia A. Sheehan	Date	February 10, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re The Application of:)	
Edward Klein et al.)	
)	
Serial No.: not yet assigned)	Examiner: not yet assigned
)	
Filed: February 10, 2000)	
)	Art Unit: not yet assigned
For: SYSTEM FOR NON-DISRUPTIVE)	
INSERTION AND REMOVAL OF)	
NODES IN AN ATM SONET RING)	
)	
		Cesari and McKenna, LLP
		30 Rowes Wharf
		Boston, MA 02110
		February 10, 2000

EXPRESS-MAIL DEPOSIT

“Express Mail” Mailing-Label Number: EL056800815US

The following paper is being deposited with the United States Postal Service
“Express Mail Post Office to Addressee” service pursuant to 37 C.F.R. §1.10:

1. Patent Application (14 pages including 19 claims)
2. Informal Drawings (2 sheets)
3. Declaration and Power of Attorney
4. Assignment with Recordation Form Cover Sheet
5. Utility Patent Application Transmittal Letter
6. Fee Transmittal
7. Check in the amount of \$690.00
8. Check in the amount of \$40.00

UNITED STATES PATENT APPLICATION

of

Edward Klein

Christopher White

Jeffrey Weiss

and

Bappa Sinha

for a

**SYSTEM FOR NON-DISRUPTIVE INSERTION AND REMOVAL OF NODES IN
AN ATM SONET RING**

SYSTEM FOR NON-DISRUPTIVE INSERTION AND REMOVAL OF NODES IN AN ATM SONET RING

FIELD OF INVENTION

The invention relates generally to asynchronous transfer mode (ATM) rings and,
5 more particularly, to mechanisms for insertion and removal of ring nodes.

BACKGROUND OF THE INVENTION

Communication rings include a plurality of nodes that are interconnected by a
communication medium, such as fiber optic cable. In known prior ATM rings, the traffic
on the ring is disrupted when a node is inserted into the ring, that is, when the node is
10 brought into the ring operations, and/or when a node is removed from the ring operations.
In order for the newly inserted node to operate in the ring, the existing nodes must be
configured to make use of the virtual paths associated with the new node. In one known
ATM ring, the nodes on the ring must be re-configured individually and manually, that is,
each must be reprogrammed. Accordingly, the traffic on the ring is disrupted as the
15 operations of each of the respective ring nodes are interrupted so that the node can be
updated to make use of the new virtual paths.

The traffic on the ring is also disrupted each time a ring node has a catastrophic
failure and must be removed from the ring operations. When a node fails, the functioning
ring nodes must again be reconfigured. In such systems, the traffic on the ring is also
20 further disrupted when the failed node is re-booted and re-inserted into the operations of
the ring. Ring traffic may also be disrupted when a node is temporarily removed from
the ring for service or upgrading and thereafter re-booted and re-inserted.

The reconfiguration of the nodes in the prior system must be performed under the
control of the system manager. Accordingly, the time to reconfigure each node, and thus,
25 the time during which traffic on the ring is disrupted at each node, and collectively over

the ring, is relatively long. Further, the time it takes to insert a node increases as the number of nodes on the ring increases.

As the rings become larger and more traffic is sent over them, the longer disruptions in the traffic are not as easily tolerated. This is particularly the case when the ring is shared by multiple customers, and any disruption adversely affects more than the customer that is, for example, joining the ring. Accordingly, what is needed is a system for inserting and removing a node without disrupting the traffic on the ATM ring.

SUMMARY OF THE INVENTION

The invention is a system and a method of operating the system for non-disruptively inserting a node into the operations of an ATM ring by first including the node as a virtual path pass through and then using the ring operations to update the routing tables at the new node and the existing nodes to include therein the one or more virtual paths associated with the new node. The system non-disruptively removes a node from the ring essentially by reversing the insertion operations. The system and method are described below in terms of a SONET ring that handles ATM traffic, but may be used in any ATM ring.

Basically, the node to be inserted establishes communications with a ring hub node over an established intra-ring management channel. The node and the ring hub node then exchange information over the intra-ring management channel and later over a virtual path that is assigned to that node, to bring the new node into the ring operations in stages without disrupting the flow of ATM traffic over the existing virtual path connections. For ease of understanding, we refer hereinafter to the node that is inserted into the ring as the "new node."

More specifically, once the new node is physically connected into the ring it operates as an optical bypass. The new node then performs its initializing routines and, as necessary, communicates with the hub node, to allow the traffic on the existing virtual paths to pass through the processor on the new node. The new node next requests that the hub node assign one or more virtual paths for directing traffic between the new node and the other nodes on the network, that is, between the new node and the other ring nodes and also the network nodes that are external to the ring. In response to the request, the

hub node assigns the virtual path or paths to the new node and establishes a signaling channel to the node over one of the virtual paths. The hub node also notifies the other nodes of the assignment, and downloads to the new node routing tables that include the established connections over the existing virtual paths.

5 The new node is thus brought fully up-to-date. Accordingly, it may participate in traffic shaping on existing virtual circuits, and in call set up and call tear down operations over its assigned virtual paths, as discussed in more detail below.

10 When a node fails, the system reverses the steps discussed above to remove the node from the ring without further disruption of the traffic on the ring. The hub node learns of the node failure when the failed node no longer communicates with the hub node, as discussed in more detail below. The hub node then instructs the operative nodes to tear down the virtual paths and associated virtual circuits that originate or end at the failed node. The nodes continue to maintain the other virtual path and virtual circuit connections over the ring, and the ATM traffic that is directed to the operative nodes is thus not disrupted. When the failed node is later re-booted, it is brought back into the ring operations without disrupting the traffic on the ring using the steps discussed above.

15 The operations of the current system are in contrast to known prior systems in which the insertion of a new node and/or the failure and re-insertion of a previously operative node requires system-operator controlled reconfiguration of the nodes on the ring.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention description below refers to the accompanying drawings, of which:

25 Fig. 1 is a functional block diagram of a system constructed in accordance with the invention;

 Fig. 2 is the system of Fig. 1 with an additional ring node;

 Fig. 3 is a flow chart of the operations of the system of Figs. 1 and 2 to insert a node; and

Fig. 4 is a flowchart of the operations of the system of Figs. 1 and 2 to removing a node..

DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

Referring now to Fig. 1, a system 10 that may be part of an ATM network includes a plurality of nodes 12₁, 12₂, ... 12_i that are referred to collectively as nodes 12. One of the nodes, for example, node 12₁, operates as a ring hub node to control ring operations.

The nodes 12 are interconnected by a primary ring 14 and a secondary ring 16. The exemplary system 10 is a unidirectional SONET ring, with information in the form of ATM cells and frames transmitted in both directions over the primary and secondary rings. The system 10 may, however, be any type of ATM ring. We discuss below how a new node is non-disruptively inserted into the ring and how a failed node is non-disruptively removed from the ring. First, however, we discuss in general the operations of the system 10.

1. Ring Operations In General

Each node 12 receives information over the rings 14 and 16 through incoming ports 20 and sends information over the rings through destination ports 22. The nodes 12 also connect to other systems (not shown), including other networks or rings, or to various user terminals, through other incoming and destination ports 24 and 26.

The ATM cells are sent over the rings from source nodes to destination nodes in virtual circuits. The system groups the virtual circuits into virtual paths that include other virtual circuits with the same source and destination nodes.

Each virtual path is identified by a virtual path index (VPI), and each virtual circuit is similarly identified by a virtual circuit index (VCI). The VPI and VCI values are included in ATM cell headers, and are used by successive nodes to determine how to route the cells.

Intermediate nodes manage the cells on a virtual path basis. When an intermediate node receives cells over a virtual path on the primary ring, the node forwards the cells to succeeding nodes on the primary ring over the same virtual path. The intermediate node may, however, use the virtual circuit information for traffic

shaping in the virtual path, in a conventional manner. Similarly, when an intermediate node receives cells over a virtual path on the secondary ring the node forwards the cells to succeeding nodes on the secondary ring over the same virtual path, and uses the virtual circuit information for traffic shaping.

5 Each destination node maintains routing tables (not shown) that reference at least the associated virtual circuits over both the primary and secondary rings and the destination ports to which the virtual circuits are directed. The destination nodes select one ring interface, based on the quality of the traffic received over both rings, and direct the traffic from the selected interface to the appropriate ports.

10 The nodes 12 exchange ring management information with the hub node 12₁ over a dedicated intra-ring management channel. In particular, the hub node 12₁ and the other ring nodes 12 exchange ring topology information over the intra-ring management channel. In the exemplary system 10, the topology information includes updates to virtual path and virtual circuit routing tables (not shown) that are maintained at each of
15 the nodes, and also information relating to the responsiveness or non-responsiveness of the various nodes. The ring nodes 12 also provide to the hub node 12₁ certain other information concerning the integrity of the primary and secondary rings by, for example, periodically sending OAM cells to the hub node over the intra-ring management channel.

20 2. Ring Operations For The Insertion Of A Node

Referring now also to Fig. 2, before a new node 12_j is inserted into the system 10, that is, before the node participates in ring operations, the cabling and the node hardware are installed in a conventional manner. Accordingly, to install a new node 12_j between, for example, the nodes 12₃ and 12₄, the cabling 15 for the primary ring 14 and the cabling
25 17 for the secondary ring 16 that connect nodes 12₃ and 12₄ are unplugged from the ports 20 and 22 of the node 12₄. While the cabling is unplugged, the traffic between the nodes 12₃ and 12₄ is re-routed around the ring. The unplugged cabling is then plugged into the appropriate incoming and destination ports of the new node 12_j and additional cabling is run between the new node and the node 12₄. Electrical connections for the two rings are
30 thus made through the connection hardware 13_j of the new node 12_j. The added cabling is depicted in the drawing by dotted lines.

Referring as well to Fig. 3, once the cabling is in place, the new node 12_j operates as an optical bypass, to physically pass ring traffic between the nodes 12₃ and 12₄ (step 300). The new node 12_j must then be inserted into the ring operations, so that users connected to the ring through the node 12_j can send and receive information over the ring.

The new node 12_j performs its initialization routines, places all virtual paths in pass through mode, and communicates with the hub node 12₁ over the intra-ring management channel to exchange information that allows a node processor in the new node 12_j to control traffic passing through the new node. In particular, the hub node and the new node 12_j exchange information that allows the node processor to process the ATM traffic on the existing assigned virtual paths through the ports 20_j and 22_j (steps 302, 304, 306). In the example, the new node contains a list of a default range of virtual paths from which all of the virtual paths on the ring are assigned, and the new node essentially configures itself, without hub node control, to operate as a virtual path pass through. If the new node did not contain such a list, the hub node would instead provide a list of the assigned virtual paths.

The new node 12_j next sends a request to the hub node 12₁ over the intra-ring management channel, asking the hub node to assign to the new node one or more virtual paths. The new node will later use these virtual paths to establish connections over virtual circuits to the other nodes in the system, both on and external to the ring (step 308). With the new node requesting its virtual path assignment, the hub node is freed from monitoring the passive activities of this node and the other new nodes that are being brought into the ring operations. Accordingly, the hub node may instead manage the dynamic operations on the ring, such as call set up and tear down.

In response to the request from the new node, the hub node assigns one or more virtual paths to the node. The hub node may then notify the other nodes of the new assignment (step 310). Alternatively, if the path assignment is within the default range, the hub node may instead update the topology information to include the new node and rely on call set up operations to update the routing tables when connections are established over the newly assigned virtual paths, as discussed below. The ring nodes 12

may instead learn of the new node through cells that are periodically introduced to test ring continuity and/or to verify ring topology.

The hub node next establishes a signaling channel over one of the virtual paths assigned to the new node. The hub node and the new node can then exchange call set up and tear down information over the signaling channel (step 312). The hub node next
5 downloads to the new node 12_j over the management channel a set of up-to-date routing tables that include all of the existing virtual path assignments and/or the associated virtual circuit connections (step 314). The routing tables are preferably the tables discussed in co-pending United States patent application Serial No. 09/344,845 entitled RAPID CALL
10 ESTABLISHMENT IN ATM RINGS which is assigned to a common assignee and is incorporated herein by reference. In the exemplary system, the hub node also downloads an error checking code, such as a check sum, that is used by the new node 12_j to verify that the routing tables were downloaded without error.

The node 12_j may now fully participate in the ring operations. More specifically,
15 the node 12_j sends over the established signaling channel requests to the hub node 12₁ to set up calls from associated users as virtual circuits over a newly assigned virtual path, and later to tear down inactive connections over the assigned virtual path. This call set up and tear down information is also sent by the hub node to the other nodes on the ring, and these nodes then update their routing tables to include the connections. Based on
20 instructions and update information received by the new node at various times from the hub node, the node 12_j updates its routing tables as new connections are established between the various other ring nodes, and as various connections are torn down. Also, the new node uses the virtual circuit information in the routing tables to shape traffic over the various virtual paths in a conventional manner.

25

3. Ring Operations For Removal Of A Failed Node

Referring now to Fig. 4, when a node 12 fails, the system 10 removes the failed node from the ring operations, without disrupting the operations of the remaining ring
30 nodes, essentially by reversing the steps for the insertion of a node. The hub node learns of the failure of, for example, node 12₃, when the node 12₃ stops communicating with the hub node over the signaling channel established between them. The hub node may also

learn of the failure of the node 12₃ when the hub node does not, during a predetermined maximum time interval, receive OAM cells or other cells that are periodically originated by the node 12₃. Alternatively, the hub node may learn of the failure when the node does not respond appropriately to the OAM cells or other test cells that the hub node originates and sends over the ring to test ring continuity and/or to verify ring topology (step 400).

Once the hub node has determined that the node 12₃ has failed, the hub node instructs the other nodes on the ring to, as necessary, re-route traffic through the operative nodes as part of a protection switching operation (step 402). If the electrical connections, that is, the cables and associated hardware, through the failed node are functional, the failed node 12₃ operates by default as an optical by-pass and the ring traffic need not be re-routed.

The hub next instructs the operative ring nodes to tear down the virtual circuits that originate from or are directed to the failed node (step 404). In response, the nodes update their routing tables. The hub node then sends updated ring topology information to the remaining nodes, and instructs them to remove from their routing tables the virtual paths associated with the failed node. At the same time, the remaining ring nodes 12 continue to send and receive ATM traffic associated with the operative ring nodes over the ring in the usual manner, that is, over the existing virtual paths and associated virtual circuits.

When the failed node 12 is later replaced or re-booted, the new or newly operative node is inserted into the ring operations in accordance with the steps discussed above with reference to Fig. 3, and the traffic over the ring is not disrupted. The same node insertion operations may also be followed after a node has been taken temporarily out of ring operations for upgrading and/or service.

The system and method of operating the system described above allow ring traffic to travel the ring without disruption while nodes are added or failed nodes are removed from the ring. This is in contrast to the operations of known prior ATM rings that require the nodes to be individually reconfigured under the control of a system manager, in order to add or remove a node from ring operations.

The foregoing description has been limited to a specific embodiment of this invention. It will be apparent, however, that variations and modifications may be made

to the invention, such as, for example, use of any type of communication media between nodes, configuration of the ring as any type of dual-path communication network, with the attainment of some or all of its advantages. Therefore, it is the object of the appended claims to cover all such variations and modifications as come within the true spirit and scope of the invention.

What is claimed is:

CLAIMS

- 1 1. A method for inserting a given node into ring operations of an ATM ring,
2 including the steps of:
3 A. operating the given node as a bypass for ATM traffic on the ring;
4 B. operating the given node to pass through virtual paths known to the given
5 node;
6 C. establishing connection to inter-ring management channel;
7 D. exchanging information between the given node and a ring hub node to operate
8 the given node as a pass through for the ATM traffic on other existing virtual path
9 connections on the ring;
10 E. assigning to the given node one or more virtual paths to direct traffic to and
11 from the given node over the ring;
12 F. communicating the virtual path assignment to all nodes on the ring; and
13 G. providing to the given node connection information for all of the virtual paths
14 and virtual circuits on the ring.
- 1 2. The method of claim 1 wherein the step of providing connection information to the
2 given node includes providing routing tables to the given node.
- 1 3. The method of claim 2 wherein the step of providing connection information further
2 includes providing the information from the hub node to the given node.
- 1 4. The method of claim 3 wherein the step of providing connection information further
2 includes
3 i. providing an error checking code with the information, and
4 ii. at the given node checking the information with the error checking code to
5 determine that the information is correct.
- 1 5. The method of claim 1 wherein the step of assigning the virtual path to the given node
2 further includes

7 D. providing to the remaining nodes on the ring updated ring topology
8 information that excludes the failed node.

1 13. The method of claim 12 wherein

2 i. the step of determining that the given node has failed includes having a ring
3 hub node determine the failure, and

4 ii. the steps of tearing down the virtual circuit and virtual path connections are
5 controlled by the hub node.

1 14. A method for inserting a given node into ring operations of an ATM ring and
2 removing a failed node from the ring operations, the method including the steps of:

3 A. operating the given node as a bypass for ATM traffic on the ring;

4 B. placing all other known virtual paths in by pass mode;

5 C. establishing connection to inter-ring management channel;

6 D. exchanging information between the given node and a ring hub node to operate
7 the given node as a pass through for the ATM traffic on existing connections on the ring;

8 E. assigning to the given node one or more virtual paths to direct traffic to and
9 from the given node over the ring;

10 F. communicating the virtual path assignment to all nodes on the ring; and

11 G. providing to the given node connection information for all of the virtual paths
12 and virtual circuits on the ring.

13 15. The method of claim 14 wherein the step of providing connection information to the
14 given node includes providing routing tables to the given node.

1 16 The method of claim 15 wherein the step of providing connection information further
2 includes providing the information from the hub node to the given node.

1 17. The method of claim 15 wherein the step of providing connection information further
2 includes

3 iii. providing a error checking code with the information, and

iv. at the given node checking the information with the error checking code to determine that the information is correct.

1 18. The method of claim 14 wherein the step of assigning the virtual path to the given
2 node further includes

3 iii. the given node requesting the assignment from the hub node, and

- 4 iv. the hub node responding to the request with the assignment.

1 19. The method of claim 14 wherein the step of communicating the virtual path
2 assignment to all of the nodes includes updating routing tables maintained by the nodes.

ABSTRACT OF THE DISCLOSURE

A system and a method of operating the system for non-disruptively inserting a node into the operations of an ATM ring uses the ring operations to update topology information and routing tables at the existing nodes to include therein the new node and one or more virtual paths associated with the new node. Basically, the node to be inserted establishes communications with a ring hub node over an established intra-ring management channel. The node and the ring hub node then exchange information over the management channel and the node performs its initializing routines in order that the node may operate to pass through traffic on the existing virtual paths. The new node next requests from the hub node the assignment of one or more virtual paths for directing traffic between that node and other nodes on the network. In response to the request, the hub node assigns one or more virtual paths to the requesting node and establishes a signaling channel to the node over one of the virtual paths. The hub node also notifies the other nodes of the assignment, and downloads to the new node routing tables that include the established connections over the existing virtual paths. The node may then participate in traffic shaping on existing virtual circuits, and also in call set up and call tear down operations over its assigned virtual paths in the same manner as the other nodes on the ring. A failed, or otherwise inoperative, node is removed from the ring without disrupting the traffic on the ring by essentially reversing the node insertion operations. After learning of the node failure, the hub node instructs the operative nodes to tear down the virtual path and associated virtual circuits that originate from or end at the failed node. Thereafter, the hub node directs the nodes to update their ring topology information to remove the failed node. In the meantime, the nodes continue to maintain the other virtual path and virtual circuit connections over the ring without disruption. When the failed node is later re-booted, the system follows the steps discussed above to re-insert the node, without disrupting the traffic on the ring.

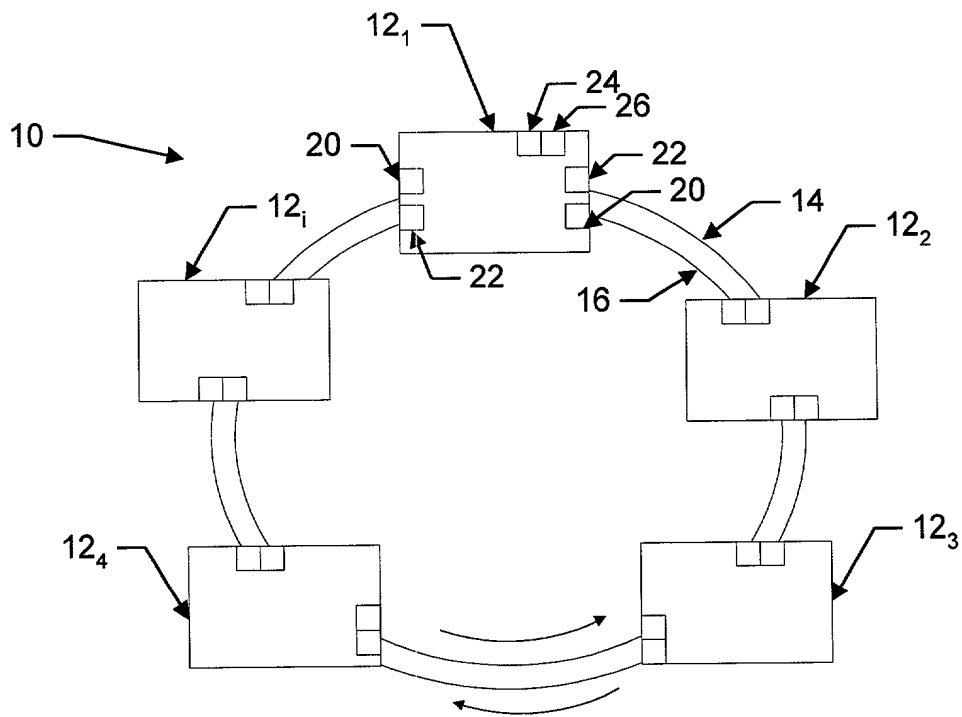


FIG. 1

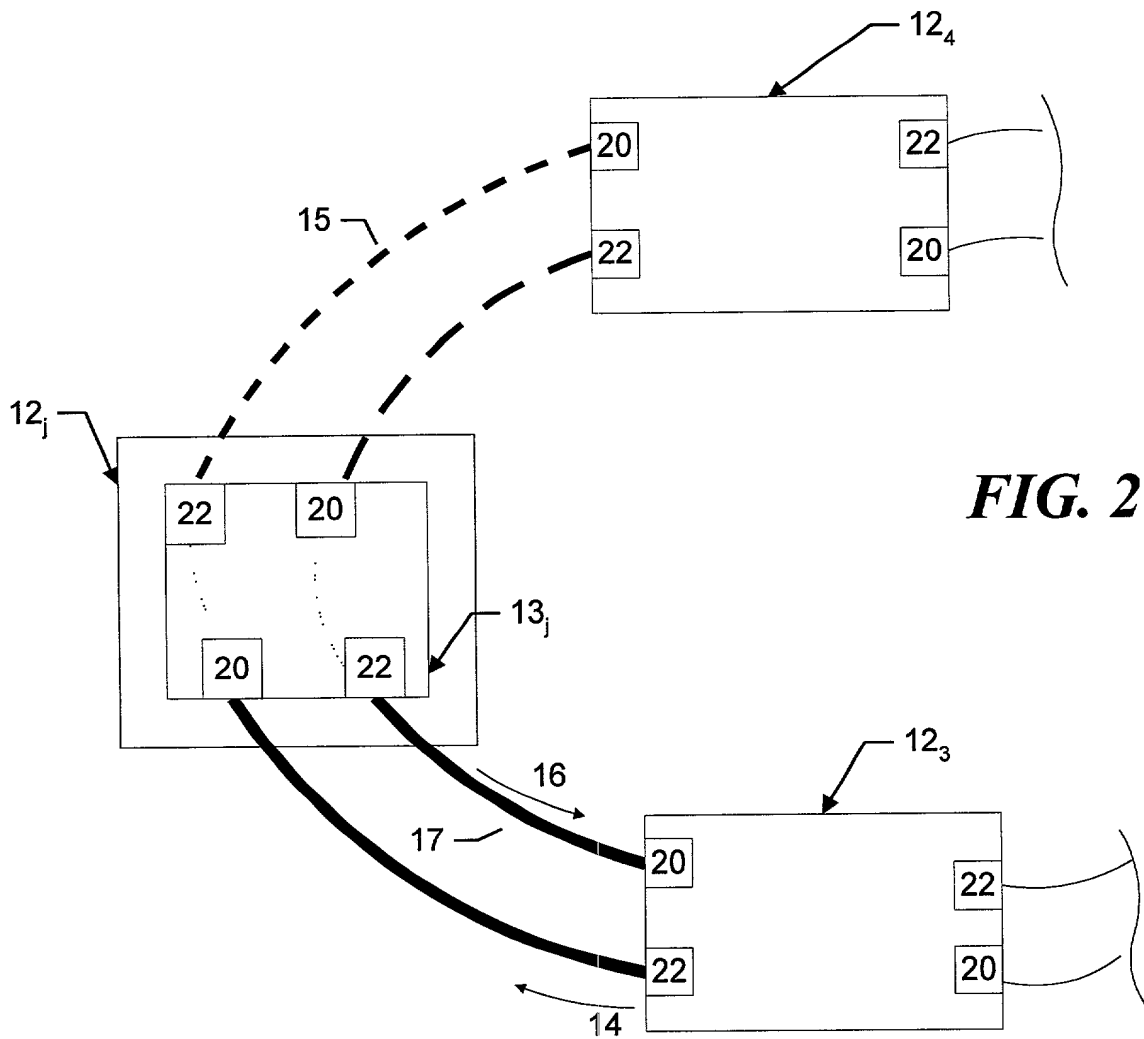
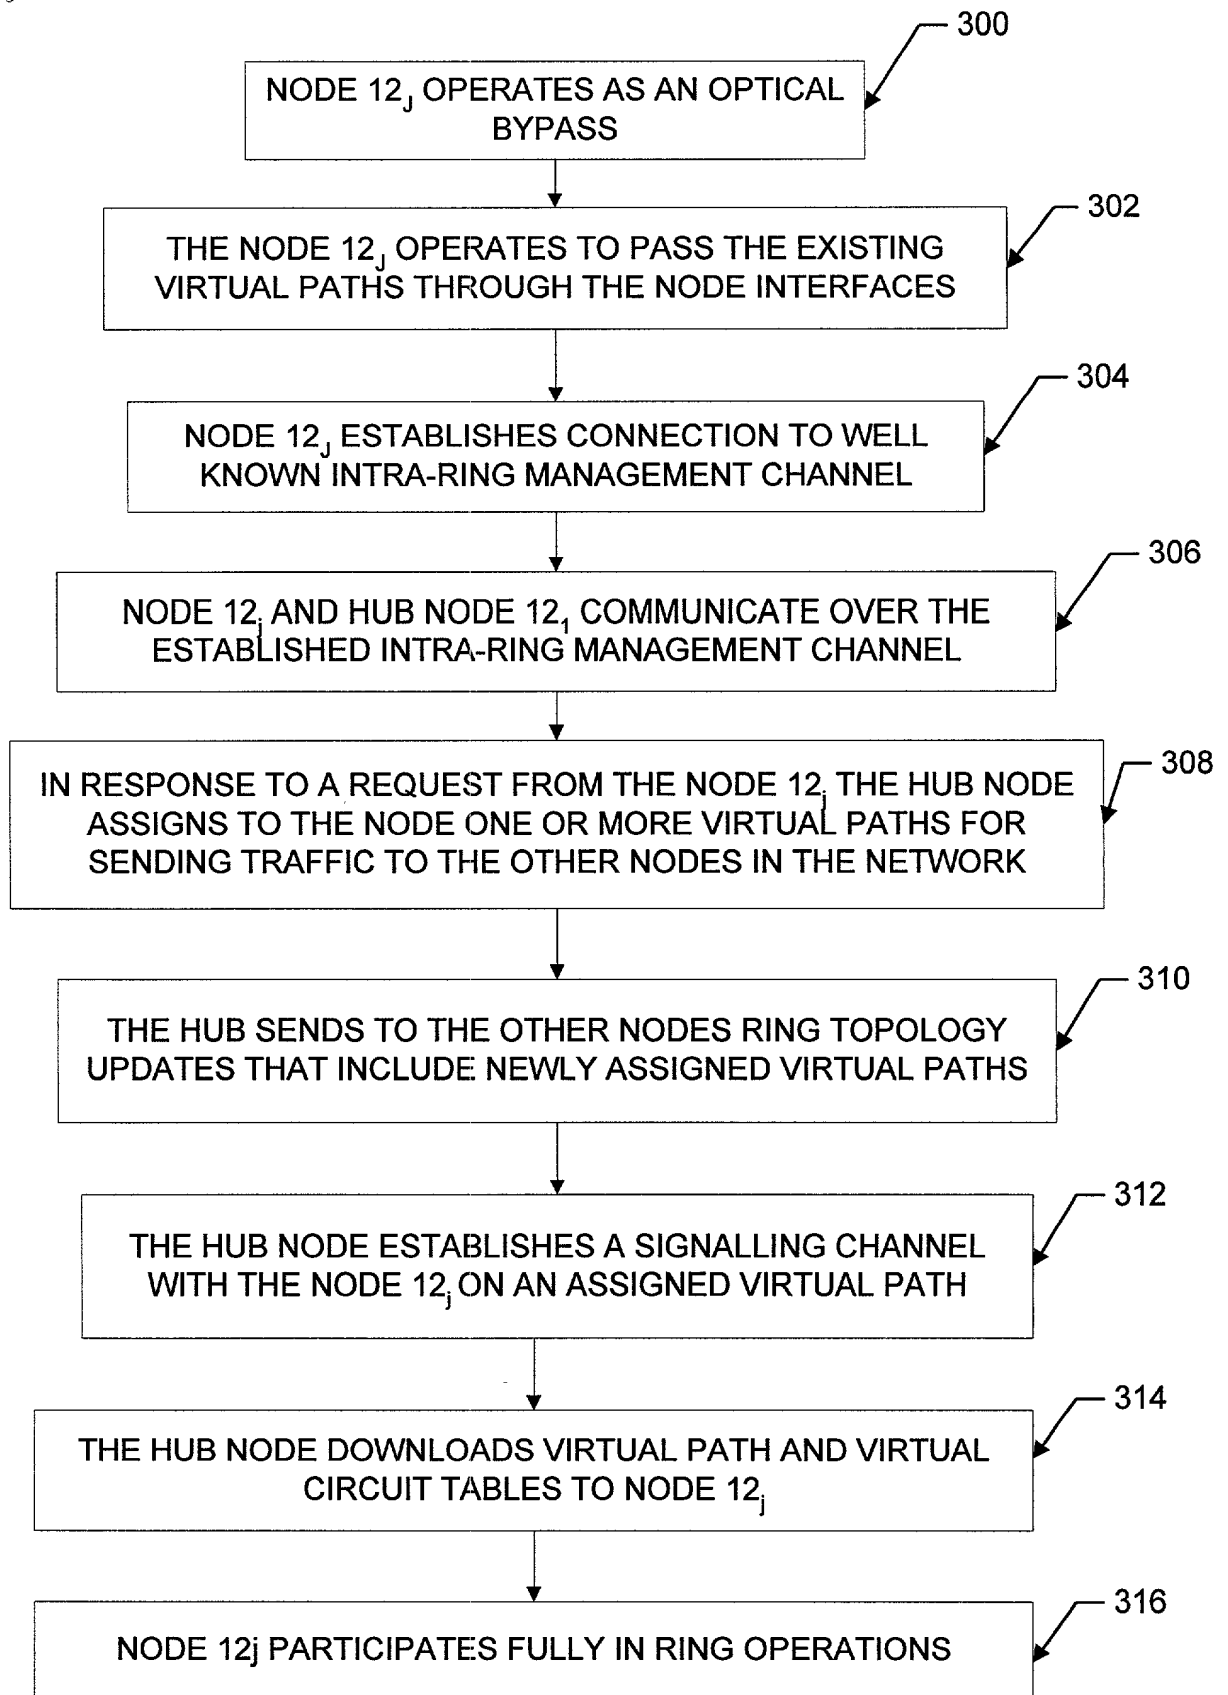


FIG. 2



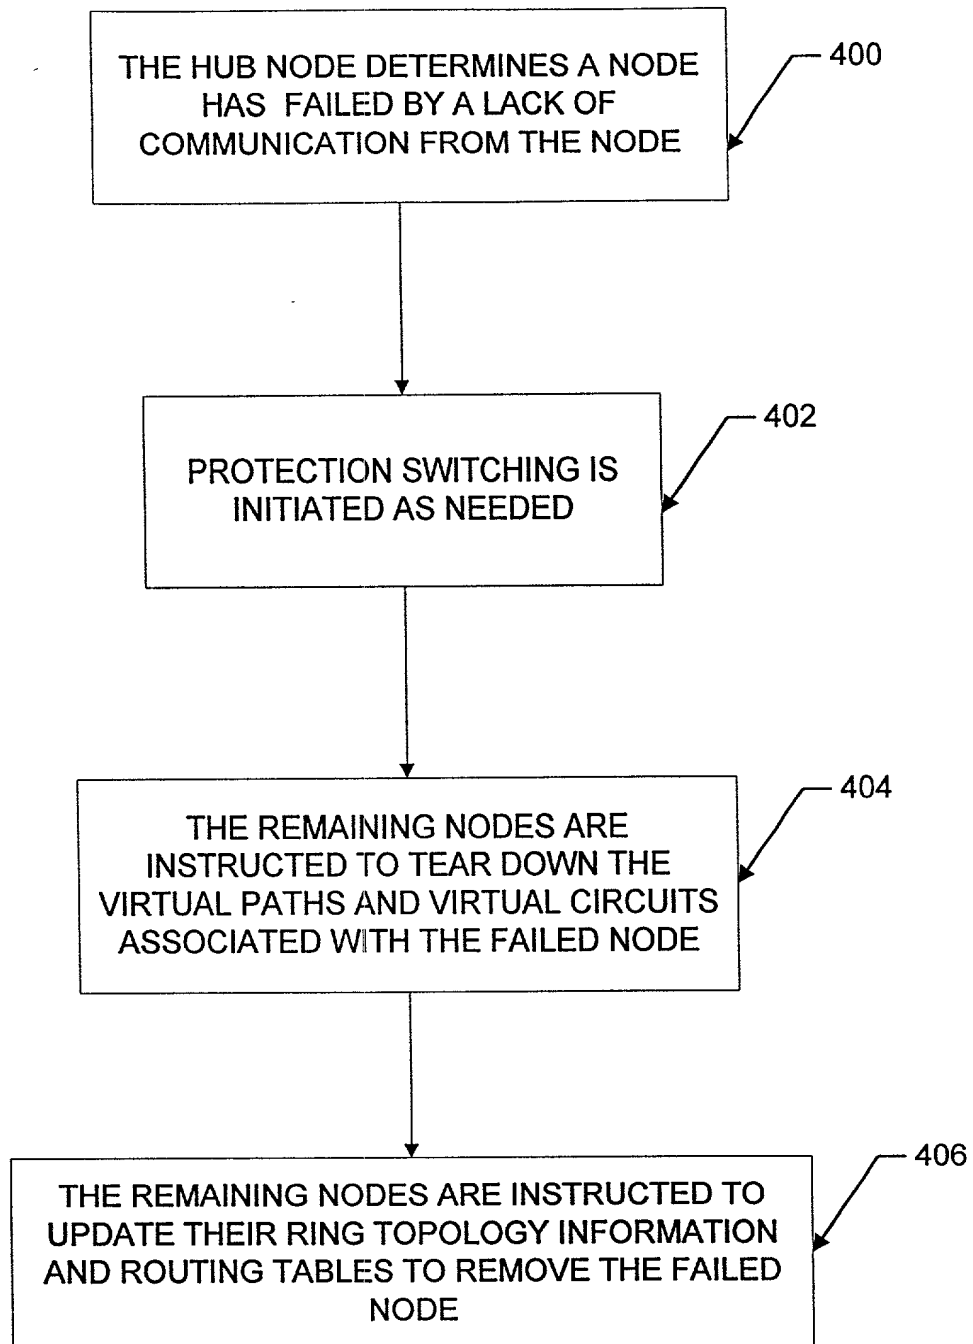


FIG. 4

PATENTS
104141-0004

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post-office address, and citizenship are as stated below next to my name.

I believe I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled SYSTEM FOR NON-DISRUPTIVE INSERTION AND REMOVAL OF NODES IN AN ATM SONET RING, the specification of which is attached hereto and identified by Cesari and McKenna File No. 104141-0004.

I hereby state that I have reviewed and understand the contents of the above-identified application specification, including the claims, as amended by any amendment specifically referred to herein.

I acknowledge the duty to disclose all information known to me that is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me on the same subject matter having a filing date before that of the application on which priority is claimed: None.

I hereby claim the benefit under Title 35, United States Code §119(e) of the following U.S. provisional application: None.

I hereby claim the benefit under Title 35, United States Code §120, of the United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United State Code, §112, I acknowledge the duty to disclose all information that is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56, and which became available to me between the filing date of the prior application and the national or PCT international filing date of this application: None.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Variable	Mean	Standard deviation	Minimum	Maximum
Age	31.5	5.2	18	45
Gender	Male	Female		
Marital status	Married	Single		
Education	High school	College		
Occupation	Manager	Worker		
Income	Low	High		
Health status	Good	Poor		
Smoking status	Smoker	Non-smoker		
Alcohol consumption	Regular	Occasional		
Exercise frequency	High	Low		
Stress level	High	Low		
Sleep quality	Good	Poor		
Dietary habits	Healthy	Unhealthy		
Family size	Small	Large		
Work-life balance	Good	Poor		
Life satisfaction	High	Low		
Overall well-being	Good	Poor		

PATENTS
104141-0004

I hereby appoint Michael E. Attaya, Reg. No. 31,731; Charles J. Barbas, Reg. No. 32,959; Joseph H. Born, Reg. No. 28,283; Robert A. Cesari, Reg. No. 18,381; Yong S. Choi, Reg. No. 43,324; Brian C. Dauphin, Reg. No. 40,983; Steven J. Frank, Reg. No. 33,497; Christopher K. Gagne, Reg. No. 36,142; A. Sidney Johnston, Reg. No. 29,548; William A. Loginov, Reg. No. 34,863; John F. McKenna, Reg. No. 20,912; Rama B. Nath, Reg. No. 27,072; Martin J. O'Donnell, Reg. No. 24,204; Thomas C. O'Konski, Reg. No. 26,320; Michael R. Reinemann, Reg. No. 38,280; Rita M. Rooney, Reg. No. 30,585; Heather B. Shapiro, Reg. No. 41,305; Patricia A. Sheehan, Reg. No. 32,301; and Joseph Steccwycz, Reg. No. 34,442, Cesari and McKenna, LLP, 30 Rowes Wharf, Boston, Mass. 02110, jointly, and each of them severally, my attorneys and attorney, with full power of substitution, delegation and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent and to transact all business in the Patent and Trademark Office connected therewith. Please direct all telephone calls to Patricia A. Sheehan at (617) 951-2500. Please address all correspondence to Patricia A. Sheehan.



Edward Klein


2/7/00

Date

Residence: 657 Winter Street
Holliston, MA 01746

Citizenship United States

Post Office Address: Same as above



Christopher J. White

7 Feb 2000

Date

Residence: 405 Wellman Avenue
N. Chelmsford, MA 01863

Citizenship United States

Post Office Address: same as above

